



Gordon installation & maintenance instructions

Package Contents

Component	Qty
A Gordon Towel Warmer	1
B Main wall mounting bracket	1
C Centre bottom bracket	1
D Screws	6
E Wall Plugs	6
F M6 x 12mm capscrew	1

Tools required

Tape measure


Spirit Level

Electric Drill

7mm Masonry drill bit to suit wall plug or screw size (Eskimo brackets will take screws up to 7mm in diameter)

Screwdriver or electric driver with PZ2 driver bit

Installation Instructions

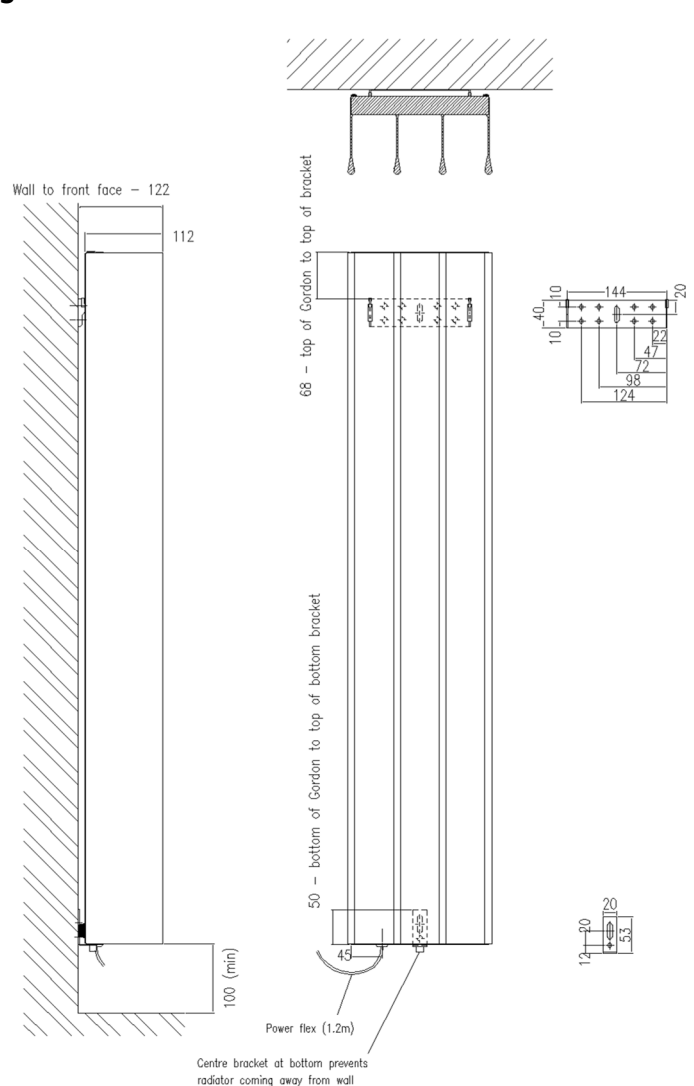

1. Before starting work, ensure working area is free of obstructions and objects that could cause harm to you or the radiator. Unpack Gordon carefully. If laying Gordon onto the floor place it with the back face to the floor, unless you can ensure that there is nothing underneath that could cause damage.
2. Mark the position of the top of Gordon on the wall, then locate the main wall mounting bracket.
3. The main wall bracket is mounted 68mm below the top of Gordon (see drawing) hold it in position and mark through the centre of the slotted bracket hole.
4. Using a 7mm masonry bit drill a hole in the wall to a suitable depth. Fit a wall plug into this hole. Now fix the main wall bracket through the central slotted hole using one of the screws provided. Do not fully tighten.
5. Adjust the main bracket for height and ensure it is level using a spirit level.
6. Using at least two of the hole positions on the bracket drill and fix the bracket firmly to the wall using the wall plugs and screws provided (we provide 8 holes to allow for a variety of fixing positions).
7. Now locate the centre bottom bracket, position this as shown on the drawing and fix the bracket firmly to the wall using the wall plugs and screws provided. The slotted hole can be used for initial adjustment prior to fixing through the remaining hole.
8. N.B. Bracket fixing positions are shown on the drawing above that will allow for pre-drilling of the holes if the product is not yet on site. Accurately mark out hole positions on the wall using a spirit level and tape measure.
9. Hang Gordon onto the main bracket ensuring it is fully engaged on the plastic spacers.
10. Using a the 5mm allen key provided fix the centre bottom bracket to the radiator using the 6mm capscrew provided – this bracket is there to lock Gordon onto the wall and prevent it from being removed or knocked off the top bracket.
11. Wire radiator into a fused spur providing a means of isolation in accordance with current ISO standards and IEE regulations.
12. If installation problems arise, please refer to the Eskimo website for more detailed information. If problems persist, please contact the Eskimo technical department – the number is shown at the top of this page.
13. See Eskimo website for cleaning advice dependent upon the finish chosen. ***Abrasive cleaners should never be used on Eskimo products.***

DECLARATION OF PERFORMANCE
No. 006CPR 2016-10-25



Gordon towel warmer for drying and warming of towels.
Type Nos: GOR10-A to GOR10-Z
For towel warming in domestic and commercial premises.

Designed & manufactured by:
Eskimo Products Ltd
Valepits Rd
Garretts Green Industrial Estate
Birmingham
B33 0TD

Manufacturing facility certified to BS EN ISO 9001:2008

Essential characteristics	Performance	Harmonised technical specification(s)
4.1 Reaction to fire class	Class A1	BS EN 60335-2-30:2009 & BS EN 60335-2-43:2003
4.2 Release of dangerous substances (pre-treatment and paint)	The materials in this product do not contain or release any dangerous substances in excess of the maximum levels specified in existing European material standards or any national regulations	
4.3 Pressure tightness – test pressure	NA	
Maximum operating pressure	NA	
4.4 Rated thermal output and thermal output in different operating conditions	Dependent upon specific part number supplied, the thermal output is certified as being in accordance with the official Eskimo Products Ltd. published data	
4.5 Durability (resistance to corrosion of the pre-treatment and paint)	Pass	
Durability (corrosion resistance of wetted parts)	NA	
Durability – fatigue resistance – pressure cycling according to Eskimo Products Ltd standard 3.1	NA	
Durability – fatigue resistance – thermal cycling according to Eskimo Products Ltd standard 3.2	Type > 5475 cycles from 10°C to 90°C Pass	
Maximum operating temperature	95°C	
Power Rating	200w	
Voltage	220-240v	
IP rating of electrical enclosures	IP56	

The performance of the product identified above is in conformity with the declared performance.

The declaration of performance is issued under the sole responsibility of the manufacturer identified above.
Signed for and on behalf of Eskimo Products Ltd:

Managing Director
Birmingham, UK, September 25th, 2016